


**DATASHEET**
**304333**


Brandson LED Outdoor Working Lamp

**TECHNICAL INFORMATION**
**BASIC INFORMATION**

<b>Dimensions</b>	H (480 mm) x W (490 mm) x L (185 mm)
<b>Weight</b>	4080 g
<b>Cable length</b>	400 cm
<b>Material</b>	Aluminum housing
<b>Colour</b>	Yellow/Black
<b>Scope of delivery</b>	<ul style="list-style-type: none"> <li>• Brandson LED Outdoor Working Lamp</li> <li>• User Manual</li> </ul>

**DETAILED DESCRIPTION**

<b>Voltage supply</b>	100 - 240 V AC 50/60 Hz
<b>Consumption</b>	Max. 100 W
<b>Beam angle</b>	Approx. 120°
<b>Colour temperature</b>	6500 K (neutral white)
<b>Light intensity</b>	9500 Lumen
<b>Energy efficiency</b>	E
<b>Lighting</b>	126 x SMD LEDs
<b>Power supply</b>	Cable-connected via power cord type F plug (CEE 7/4)
<b>Protection class</b>	IP65
<b>Working temperature</b>	- 30°C to + 50°C

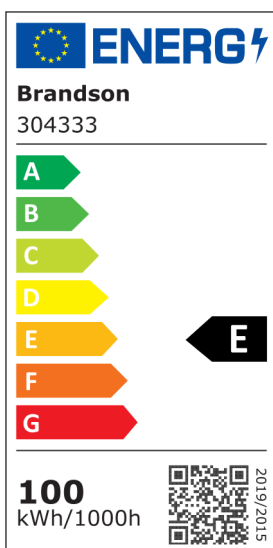


**DATENBLATT**
**304333**


Brandson LED Outdoor Baustrahler

**TECHNISCHE INFORMATIONEN**
**BASIS-INFORMATIONEN**

<b>Abmessungen</b>	H (480 mm) x B (490 mm) x L (185 mm)
<b>Gewicht</b>	4080 g
<b>Kabellänge</b>	400 cm
<b>Material</b>	Aluminium-Gehäuse
<b>Farbe</b>	Gelb/schwarz
<b>Lieferumfang</b>	<ul style="list-style-type: none"> <li>• Brandson LED Outdoor Baustrahler</li> <li>• Bedienungsanleitung</li> </ul>

**DETAILIERTE SPEZIFIKATIONEN**

<b>Spannungsversorgung</b>	100 - 240 V AC 50/60 Hz
<b>Leistungsaufnahme</b>	100 W
<b>Abstrahlwinkel</b>	ca. 120°
<b>Farbtemperatur</b>	6500 K (neutralweiß)
<b>Lichtstärke</b>	9500 Lumen
<b>Energieeffizienzklasse</b>	E
<b>Beleuchtungstyp</b>	126 x SMD LEDs
<b>Stromversorgung</b>	Kabelgebunden über Netzkabel Typ F Stecker (CEE 7/4)
<b>Schutzart</b>	IP65
<b>Arbeitstemperatur</b>	-30°C bis +50°C

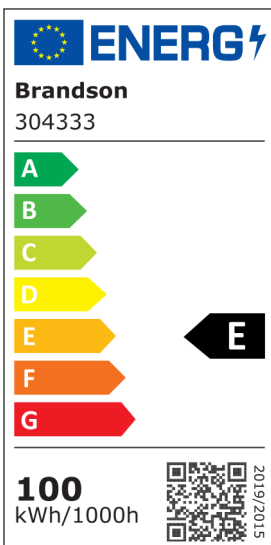

**ENERGY**

**Brandson**  
304333

A  
B  
C  
D  
**E**  
F  
G

**100**  
kWh/1000h

2019/2015

