



## DATASHEET

## 304415

Brandson LED Outdoor Working Lamp


### TECHNICAL INFORMATION

#### BASIC INFORMATION

<b>Dimensions</b>	H (320 mm) x W (330 mm) x L (200 mm)
<b>Weight</b>	2600 g
<b>Cable length</b>	150 cm
<b>Material</b>	Aluminum housing
<b>Colour</b>	Yellow/Black
<b>Scope of delivery</b>	<ul style="list-style-type: none"> <li>• Brandson LED Outdoor Working Lamp</li> <li>• User Manual</li> </ul>

#### DETAILED DESCRIPTION

<b>Voltage supply</b>	100 - 240V AC / 50/60 Hz
<b>Consumption</b>	Max. 100 W
<b>Beam angle</b>	Approx. 120°
<b>Colour temperature</b>	6000 K (neutral white)
<b>Light intensity</b>	10000 Lumen
<b>Energy efficiency</b>	E
<b>Lighting</b>	144 x LEDs (SMD)
<b>Power supply</b>	Cable-connected via power cord type F plug (CEE 7/4)
<b>Protection class</b>	IP65
<b>Working temperature</b>	- 10°C to + 40°C

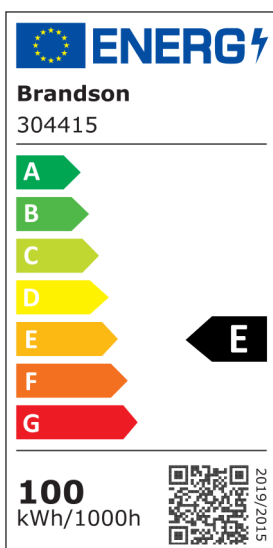


**DATENBLATT**
**304415**

Brandson LED Outdoor Baustrahler

**TECHNISCHE INFORMATIONEN**
**BASIS-INFORMATIONEN**

<b>Abmessungen</b>	H (320 mm) x W (330 mm) x L (200 mm)
<b>Gewicht</b>	2600 g
<b>Kabellänge</b>	150 cm
<b>Material</b>	Aluminium-Gehäuse
<b>Farbe</b>	Gelb/schwarz
<b>Lieferumfang</b>	<ul style="list-style-type: none"> <li>• Brandson LED Outdoor Baustrahler</li> <li>• Bedienungsanleitung</li> </ul>

**DETAILLIERTE SPEZIFIKATIONEN**

<b>Spannungsversorgung</b>	100 - 240V AC / 50/60 Hz
<b>Leistungsaufnahme</b>	100 W
<b>Abstrahlwinkel</b>	ca. 120°
<b>Farbtemperatur</b>	6000 K (neutralweiß)
<b>Lichtstärke</b>	10000 Lumen
<b>Energieeffizienzklasse</b>	E
<b>Beleuchtungstyp</b>	144 x LEDs (SMD)
<b>Stromversorgung</b>	Kabelgebunden über Netzkabel Typ F Stecker (CEE 7/4)
<b>Schutzart</b>	IP65
<b>Arbeitstemperatur</b>	-10°C bis +40°C

